

Door Thickness	Version
for 0.8 -1.2 mm panels	1
for 1.2 -1.5 mm panels	2
for 1.5 - 2 mm panels	3 *

* in this version IP 65 is not available

660

QUARTER TURN – EASY FIXING



IP 65



LH/RH

RoHS



- Easy assembly by clips
- Mounting nut not required.
- Specially designed internal spring provides 1.5 mm torsion
- Can be used for panel thickness 0.8 to 2 mm
- Please contact Essentra Components for special colours

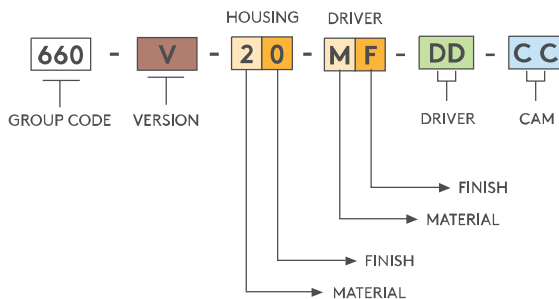
APPLICATIONS

Electric panels, machinery covers,

MATERIAL




HOUSING: PA6 GFR 30
 DRIVER: Zamak DIN-EN 1774-ZnAl4Cu1 or PA6 GFR 30
 CAM: Steel or Plastic

PRODUCT CODE



MATERIAL	M
Zamak	1
Plastic	2

FINISH	F
Chrome	1
Black coated	2
No finish	0

-  For cams please check pages: 144 - 145
-  For drivers please check page: 166
-  For keys please check pages : 162 - 163